


Steel Work Platform With 2 Door Entry and Poly Casters 36 In. x 36 In. 1,000 Lb. Capacity Blue

MODEL WP-3636-CA-DD

Fork Truck Attachments / Work Platforms

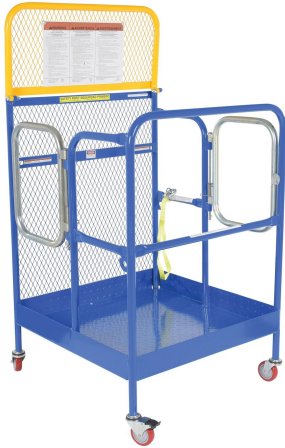

PRODUCT OVERVIEW

This convenient fork truck work platform quickly and safely raises maintenance personnel where they are needed. Attaches to fork truck by inserting forks into fork pockets and securing platform to fork truck. Fork locks secure platform to forks. Dual handrails on three (3) sides with expanded metal backing on the fourth side. Includes checker floor plate platform and long strap with hook to attach platform to fork truck. A maximum of two (2) people can be in the work platform at one time.

KEY FEATURES

- Fork locks secures work platform to forks of fork truck
- Included casters for easy movement between areas
- Tread plate floor provides a safe non-slip grip
- Dual doors for access from either side

CORE PRODUCT DATA

ASSEMBLED WEIGHT
168 lbs

ASSEMBLED SIZE
36.1875" W x 39" L x 69.75" H

SHIP WEIGHT
168 lbs

PACKAGE 1 SIZE
36" W x 36" D x 51" H

COLOR / FINISH
Blue / Yellow

FREIGHT TYPE
LTL Loose

AVAILABILITY Available

QUICKSHIP: YES

Products are sold through Vestil distributor partners. Contact a distributor for current pricing and ordering.

PRODUCT SPECIFICATIONS

Uniform Capacity (lb.)	1,000
Fork Pocket Center (in.)	16
Front and Rear Fork Pocket Width (in.)	7-3/4
Rear Fork Pocket Height (in.)	3-7/8
Front Fork Pocket Height (in.)	1-7/8
Strap Length (in.)	36
Top Rail Height (in.)	42-1/8
Mid Rail Height (in.)	21
Entry Style	Dual Side Door
Toeboard Height (in.)	4-1/8
Handrail Design	Fixed
Door Width (in.)	16
High Back Height (in.)	60
Platform Size (in.)	36 x 36
Caster Quantity/Diameter/Width (in.)	(4) 4 x 1-1/4
Caster Quantity Type	(2) Swivel (2) Swivel with Brake
Anchor Point Capacity (lbs.)	350

PRODUCT & SHIPPING REFERENCE

Shipping Point: Angola, IN 46703

Warranty:

1 Year

AVAILABLE PRODUCT RESOURCES



SCAN FOR CURRENT PRODUCT DATA

Live product page: <https://www.vestil.com/product.php?FID=470>